



ORDERING INFORMATION

CNX-LRL4 - P2 - 3M - 42 - 048 - L - CTR - GRY - 500 - DCV

- LED ROADWAY LIGHT**
- INPUT VOLTAGE**
P2 - 18-36 VDC
- COLOR TEMPERATURE**
42 - 4200 K
50 - 5000 K
- LUMINAIRE TYPE**
L - 3 MODULES
- DRIVE CURRENT**
500 mA
- LATERAL LIGHT DISTRIBUTION**
2M - TYPE II MEDIUM
3M - TYPE III MEDIUM
5M - TYPE V MEDIUM
- NUMBER LEDS**
048 - 48 LEDs
- CONTROL**
CTR - CONTROL
XXX - NO CONTROL
- FIXTURE COLOR**
 - GRY - GREY
 - BLK - BLACK
 - SLV - SILVER
 - WHT - WHITE
 - BRZ - BRONZE
 - *Standard Color

PRODUCT SPECIFICATIONS

Number of LEDs	48
Luminous Flux (lm) (Typ.)	8800
Power Consumption (W) (Max.)	81
LED Drive Current (mA)	500
Correlated Color Temperature (CCT) (K) (Typ.)	4200K / 5000K
Operating Voltage Range	24VDC
Color Rendering Index (CRI)	≥ 74
Power Factor (PF)	> 0.9 at full load
Total Harmonic Distortion (THD)	< 20% at full load
Operating Temperature Range	-40F ~ +140 F
Ingress Protection Classification	Suitable for Wet Conditions, IP 66 / IP 54* Rating. *With Drain Holes
Material Characteristics	Aluminum Die Casting, UV Resistant PC
Weight (lbs)	21.1
EPA	0.78
Surge Protection	10 kV, 10 kA
BUG Rating	B3 U0 B3




SHIPPING DIMENSIONS

Product Line	# LED Boards	Length (cm)	Width (cm)	Height(cm)	Weight (kg)	Skid (pcs)
48 LEDS	3	78.8	39.4	19.4	12.5	30

DIMENSIONS

PHOTOMETRIC

ILLUMINANCE AT DISTANCE

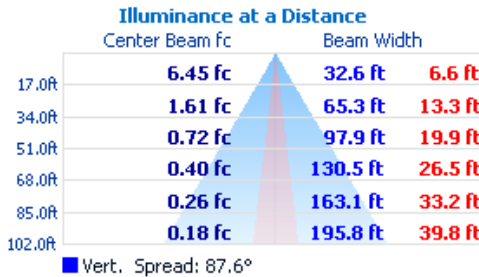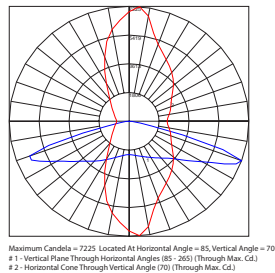

PRODUCT CERTIFICATIONS

