



## Applications:

Security, pathway and perimeter lighting, Building entryways and walkways

## Features

- Sealed die-casting profile for indoor and outdoor applications.
- Voltage is 120-277V.
- Lumen output 3200-4050lm.
- Polycarbonate optical lens with UV stabilizers
- Photocell optional
- Replacing 100W MH.
- Operating temperature is  $-40^{\circ}\text{C}$  to  $40^{\circ}\text{C}$  ( $-40^{\circ}\text{F}$  to  $104^{\circ}\text{F}$ ).
- UL/cUL wet location listed and DLC premium qualified.



## PERFORMANCE DATA




		4000K(70CRI)		5000K(70CRI)	
SYSTEM WATTS	VOLTAGE	LUMENS	LPW	LUMENS	LPW
25W	120-277VAC	3200lm	128 lm/W	3200lm	128 lm/W
30W	120-277VAC	4000lm	133 lm/W	4050lm	135 lm/W

## ELECTRICAL DATA

Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
1	390	25	120	0.21
		25	208	0.12
		25	240	0.10
		25	277	0.09
1	800	30	120	0.25
		30	208	0.14
		30	240	0.13
		30	277	0.11


## DIMENSION

unit: inch/mm

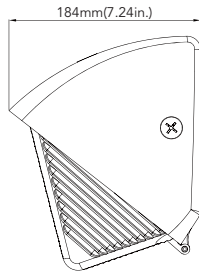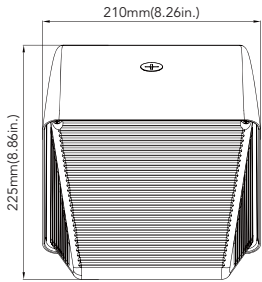

Weight:  
30W: 3.71lb  
25W: 3.38lb

## PHOTOMETRICS

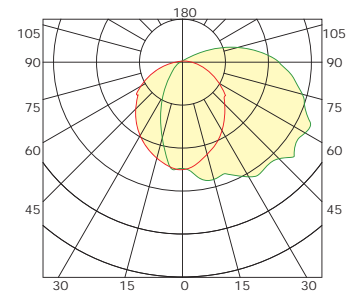

## ORDERING GUIDE

Example: MWP05 30W 27V 50K Y Y

Fixture Type	Wattage	Voltage	CCT	Finish	Photocell (Option)
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
<b>MWP05</b> Wall Pack Series	<b>25W</b> 25W <b>30W</b> 30W	<b>27V</b> 120-277V	<b>40K</b> 4000K <b>50K</b> 5000K	<b>D</b> Dark Bronze <b>B</b> Black <b>W</b> White	<b>P1</b> 120V Photocell <b>P0</b> 120-277V Photocell <b>Blank</b> Without Photocell

## DLC Model NO.

SYSTEM WATTS	VOLTAGE	CCT	DLC NO.	DLC Classification
30W	120-277V	4000K	MWP0530W27V40K[D,B,W][Blank,P1,P0]	Premium
		5000K	MWP0530W27V50K[D,B,W][Blank,P1,P0]	Premium

For more information please contact:

www.enduraliteLED.com Tel. (204) 222 6825 Fax.(888) 735 3522 Toll Free: 1-844-4-ENDURA  
18 Don Valley Parkway Winnipeg, Manitoba R2C-2Z2 Canada. Email: info@enduraliteled.com